


860 MHz – 870MHz RFID 10 inch panel antenna

Features

- Low profile with high gain
- Maximum efficiency and performance across the entire frequency band
- 254mmx254mmx25.4mm
- IP67
- Connector type :
RP-TNC/N or custom made

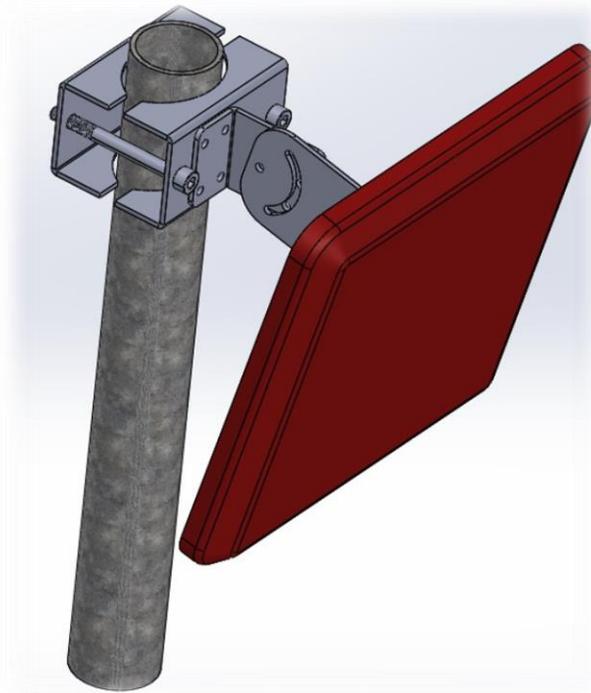


Applications


- Access control
- Fleet management
- Warehouse management
- Intelligent management of traffic

BAND	860-870MHz
STANDARD	ISM
Frequency(MHz)	865MHz Band
Max. VSWR	<1.41
Max. Return loss (dB)	<-15.39
Peak gain(dB)	8.9
Efficiency(%)	>90
Radiation properties	Directional
Max. input power	10W
Polarization	Circular
Impedance(ohms)	50

Return loss

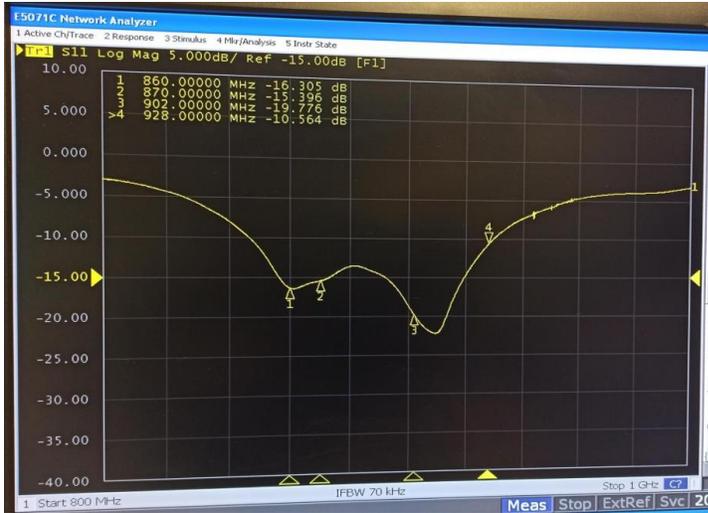

Gain

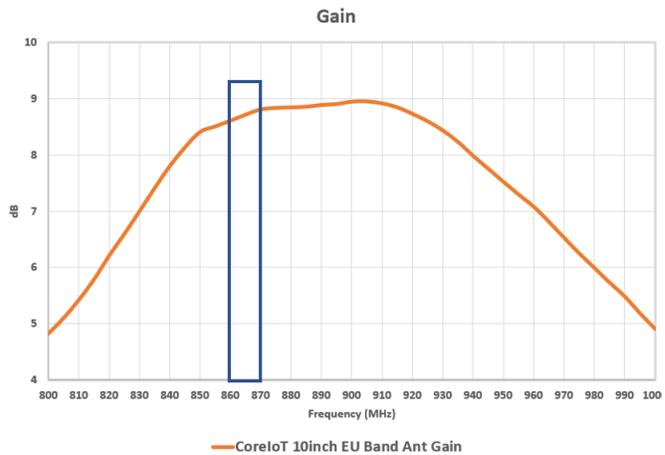

Radiation Pattern

